


Safety isolating transformer APT 22/2/9 - no longer available

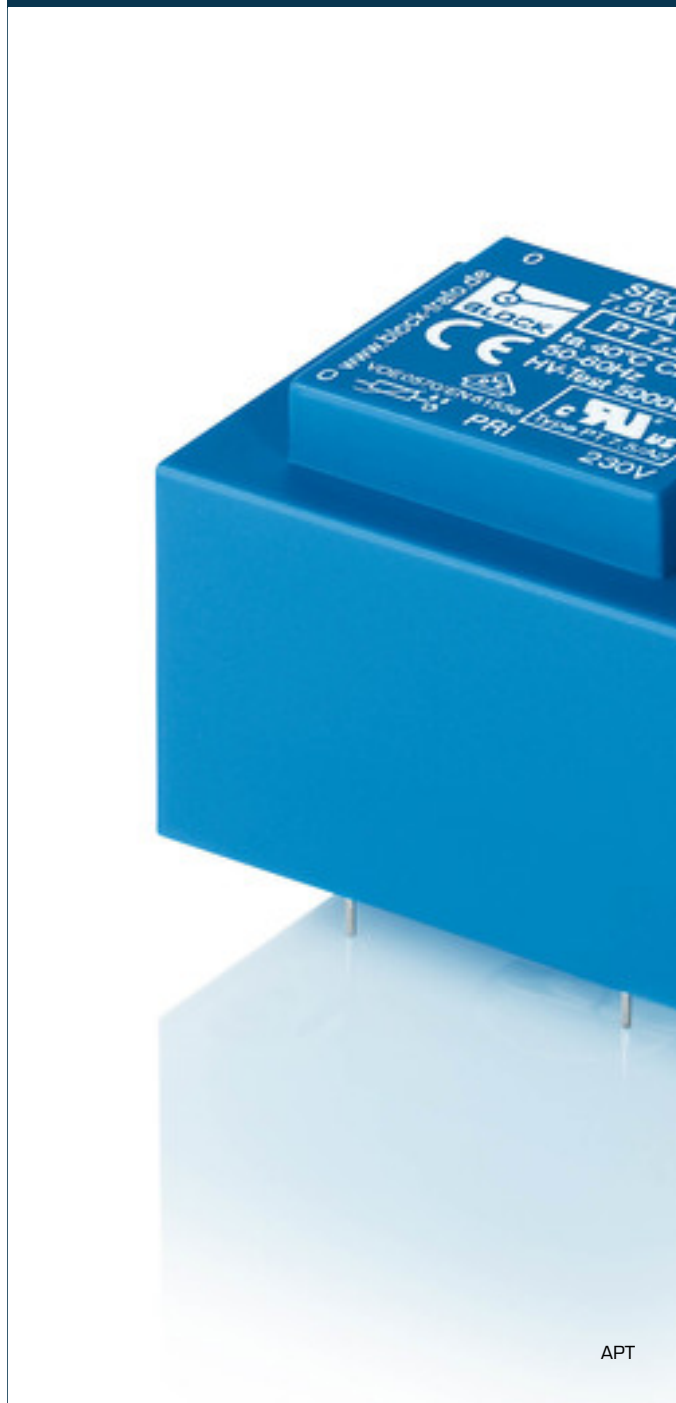

APT

Advantages

Minimum size at high output

Integrated overload protection using PTC in the input

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation

Self-extinguishing potting material

Space saving installation thanks to additional screw mounting in the base plate

Applications

As a safety transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66



Safety isolating transformer APT 22/2/9 - no longer available

Type		APT 22/2/9 - no longer available		
Electrical data	Type			APT 22/2/9 - no longer available
	Input			
	Rated input voltage			115 Vac
	Rated frequency			50 - 60 Hz
	Output			
	Rated output voltage			2 x 9 Vac
	Rated Power			22 VA
	No-load voltage (app. x factor)			1.19
	No-load loss (typ.)			2.40 W
	Efficiency			77.0 %
	Standards			
	Classification			Safety isolating transformer
	Approvals			
	Approvals			cURus, VDE
	Environment			
	Ambient temperature max.			40 °C
	Safety and protection			
Type			Encapsulated	
Insulation class			VDE=B, UL=class 105	
Protection index			IP 00	
Safety class (prepared)			II	
Short circuit strength			non-inherently short-circuit proof	
Order numbers				
Order Number			APT 22/2/9 - no longer available	
Mechanical data	Type			APT 22/2/9 - no longer available
	Terminal and mounting			
	Terminals			Pins for printed circuit boards
	Measures and weights			
	Dimension (W x H x D)			
Pin (ø)			0.8 mm	
Core type			EI 60/21	
Weight			0.57 kg	