

100 V-line transformer

AÜ 100/25 Discontinued line - not for new designs



Picture shows AÜ 100/10

Advantages

Solder tab for free wiring

Universally designed for 4, 8 and 16 Ohms

Additional tapings at 3/4, 1/2 and 1/4 output

Very good moisture protection and low noise thanks to BLOCKIMPEX vacuum impregnation

Simple mounting thanks to robust metal fixing rail with oval slots

Applications

100 Vac transformer for electro-acoustic installations with a 100 Vac transmission circuit.

Standards

100 V-line transformer
to DIN EN 60950

Approvals




100 V-line transformer

AÜ 100/25 Discontinued line - not for new designs

Type		AÜ 100/25 Discontinued line - not for new designs
Electrical data	Input	
	Rated input voltage	0 - 100 Vac
	Rated frequency	35 - 15000 Hz
	Output	
	Output power	25 / 18.8 / 12.5 / 6.3 W
	Impedance	400/532/800/1600 Ω
	Environment	
	Ambient temperature max.	40 °C
	Safety and protection	
	Type	Open type
	Insulation class	E
	Protection index	IP 00
	Safety class (prepared)	I
	Short circuit strength	non-short-circuit proof
Test voltage	1500 Vac, 50 Hz	
Order numbers		
Order Number	AÜ 100/25 Discontinued line - not for new designs	

Type		AÜ 100/25 Discontinued line - not for new designs
Mechanical data	Terminal and mounting	
	Fixing method	Mounting brackets
	Terminals	Solder tab
	Measures and weights	
	Weight	0.96 kg

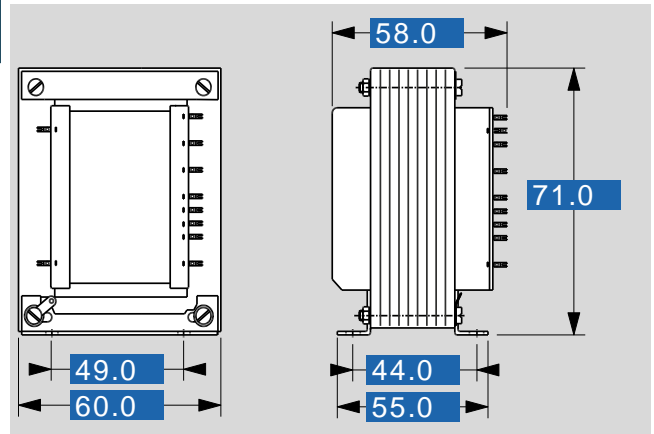

Subject to change.