

100 V-line transformer

AÜ 100/50 - no longer available



Picture shows AÜ 100/10

Advantages

Solder tab for free wiring

Universally designed for 4, 8 and 16 Ohms

Additional tapings at 3/4, 1/2 and 1/4 output

Very good moisture protection and low noise thanks to BLOCKIMPEX vacuum impregnation

Simple mounting thanks to robust metal fixing rail with oval slots

Applications

100 Vac transformer for electro-acoustic installations with a 100 Vac transmission circuit.

Standards

100 V-line transformer
to DIN EN 60950

Approvals




100 V-line transformer

AÜ 100/50 - no longer available

Type	AÜ 100/50 - no longer available
Electrical data	
Input	
Rated input voltage	0 - 100 Vac
Rated frequency	30 - 15000 Hz
Output	
Output power	50 / 37.5 / 25 / 12.5 W
Impedance	200/266/400/800 Ω
Environment	
Ambient temperature max.	40 °C
Safety and protection	
Type	Open type
Insulation class	E
Protection index	IP 00
Safety class (prepared)	I
Short circuit strength	non-short-circuit proof
Test voltage	1500 Vac, 50 Hz
Order numbers	
Order Number	AÜ 100/50 - no longer available

Type	AÜ 100/50 - no longer available
Mechanical data	
Terminal and mounting	
Fixing method	Fixing rail
Terminals	Solder tab
Measures and weights	
Weight	1.94 kg

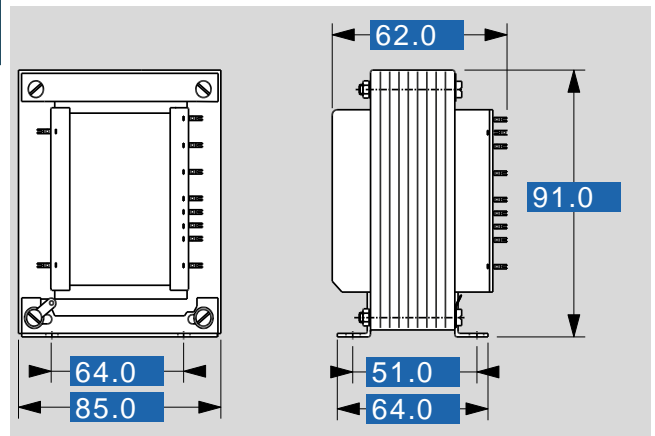

Subject to change.