


## Motor reactor MR3-CD055-483-0

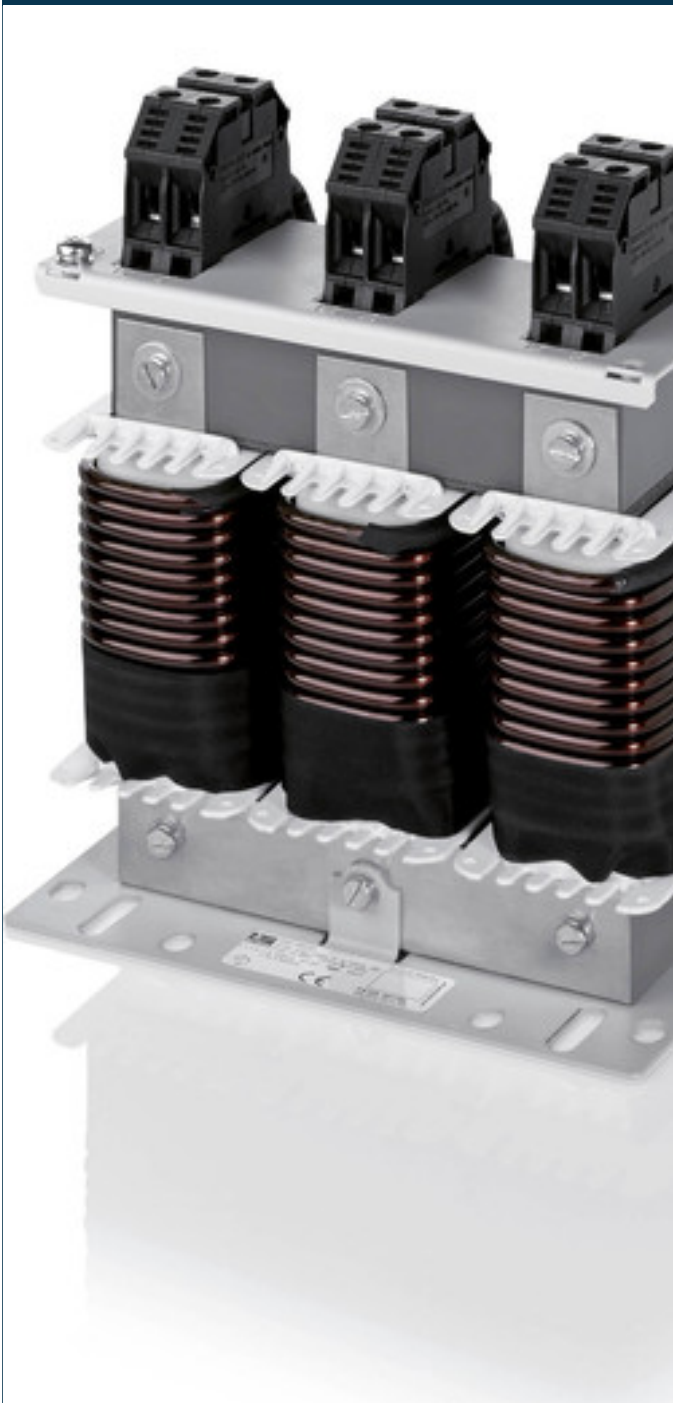

### Advantages

- High damping of edge steepness
- High damping of inverter switching frequency
- Reduction of leakage current at low construction volumes
- Long shielded cable lengths possible
- High efficiency
- Very good corrosion protection and low noise thanks to vacuum impregnation

### Applications

Motor reactor for the limitation of the voltage peaks damaging to the motor insulation (dv/dt).

### Standards

Output reactor for frequency converter  
DIN EN 61558-2-20, IEC 61558-2-20

### Approvals





# Motor reactor

## MR3-CD055-483-0

Type		MR3-CD055-483-0
Electrical data	Operating data	
	Rated voltage	3 x 480 Vac
	Rated current	55 A
	for motor rated output approx.	30.00 kW
	Inductance	0.420 mH
	Rated frequency	0 - 60 Hz
	Output	
	Switching frequency	2 - 10 kHz
	Approvals	
	Approvals	cULus
	Environment	
	Ambient temperature	-10 °C - + 50 °C
	Safety and protection	
	Type	Open type
	Protection index	IP 00
Test voltage	4000 Vac, 50 Hz	
Max. temp. rise	115 °C	
Order numbers		
<b>Order Number</b>	<b>MR3-CD055-483-0</b>	

Type		MR3-CD055-483-0
Mechanical data	Terminal and mounting	
	Terminals phase	10 - 4
	Fixing method	Fixing rail
	Measures and weights	
	Weight	11.2 kg

Subject to change.