


# Safety isolating transformer

## VCN 16/2/15 - no longer available

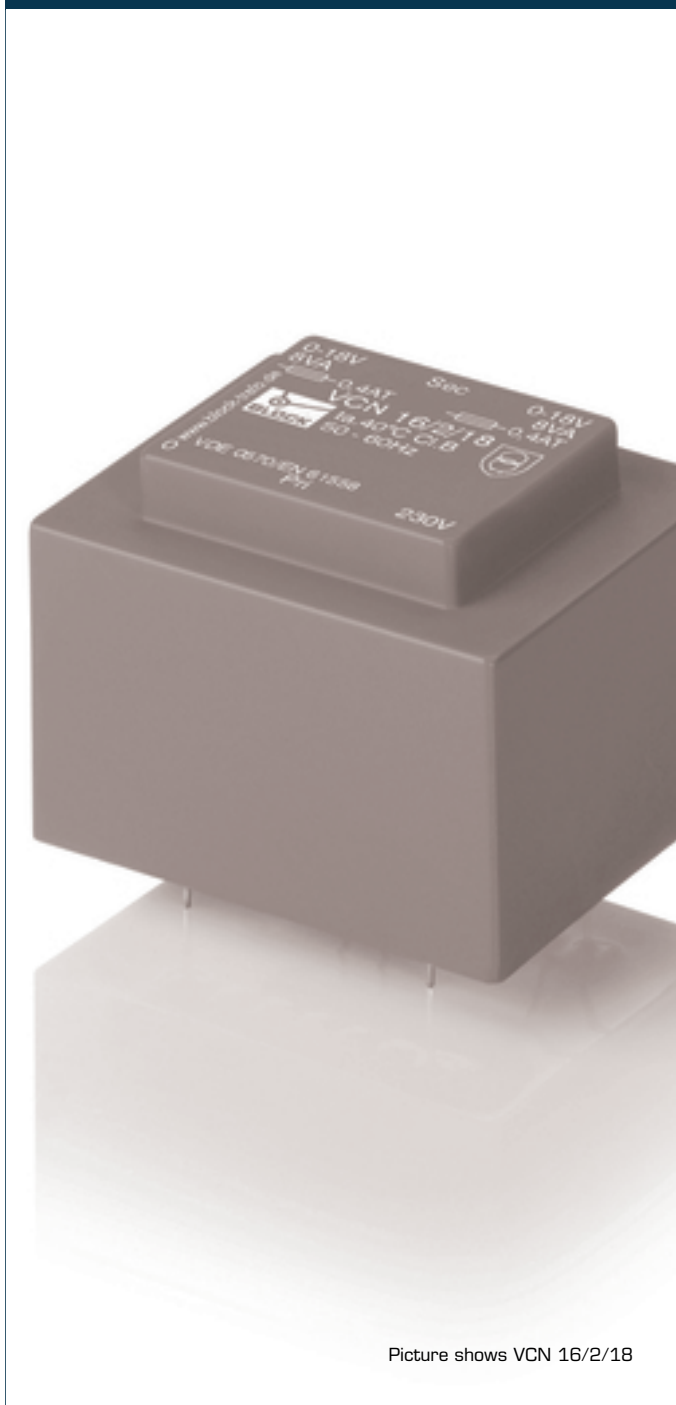


Picture shows VCN 16/2/18

## Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application



## Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

## Approvals






# Safety isolating transformer

## VCN 16/2/15 - no longer available

Type		VCN 16/2/15 - no longer available
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	15.0 Vac
	Rated Power	16.0 VA
	No-load voltage (app. x factor)	1.22
	No-load loss (typ.)	2.50 W
	Efficiency	74.0 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, VDE
	Environment	
	Ambient temperature max.	70 °C
	Safety and protection	
	Type	Encapsulated
Insulation class	B	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Order numbers		
<b>Order Number</b>	<b>VCN 16/2/15 - no longer available</b>	

Type		VCN 16/2/15 - no longer available
Mechanical data	Terminal and mounting	
	Terminals	Pins for printed circuit boards
	Measures and weights	
	Pin (ø)	0.8 mm
	Core type	EI 54/18,8
	Weight	0.40 kg

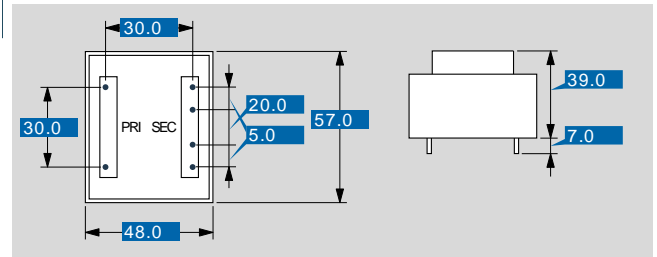

Subject to change.