


Safety isolating transformer

EP 7,5/18 - no longer available

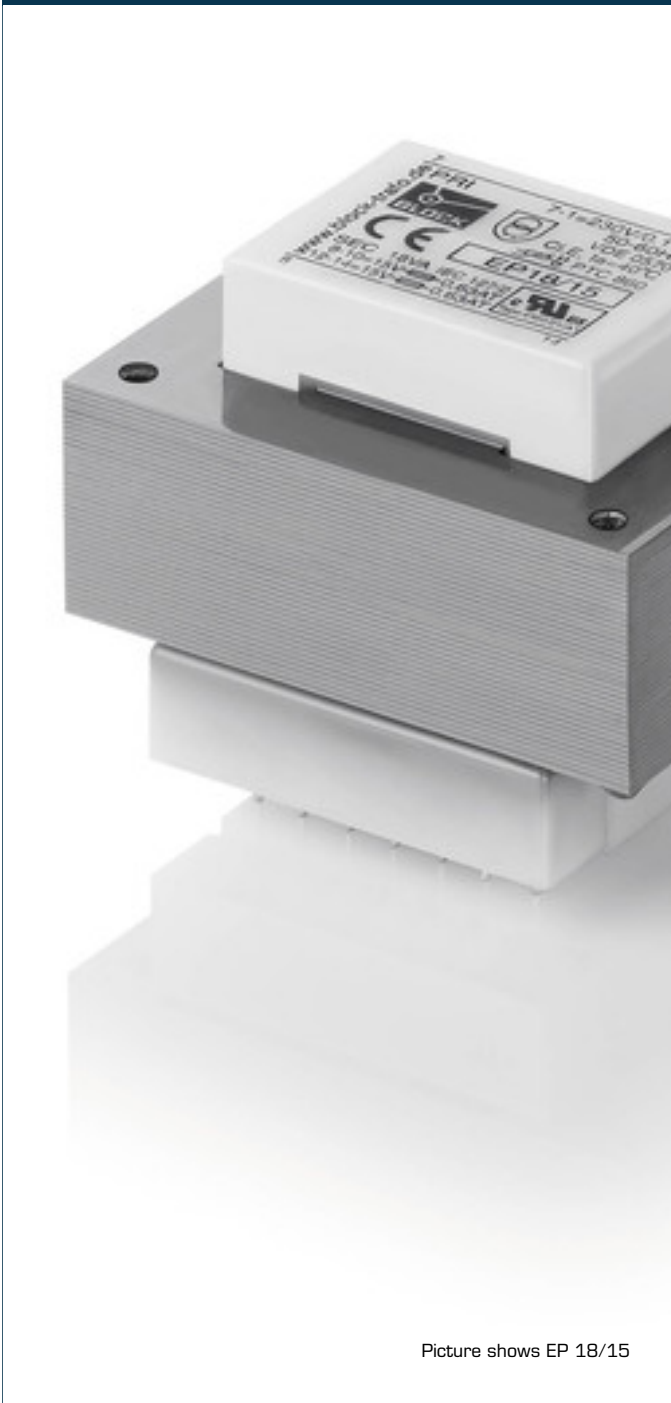

Picture shows EP 18/15


Advantages

- Minimum size at high output
- Double output voltage for series or parallel connection
- Very good moisture protection and low noise thanks to vacuum impregnation
- Contact protected on the circuit board thanks to covered solder pin strips
- Stable connection technology with injected round wire soldering pins
- Additional mounting option with holes in the core

Applications

Safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

Approvals






Safety isolating transformer EP 7,5/18 - no longer available

Type	EP 7,5/18 - no longer available
Electrical data	
Input	
Rated input voltage	230 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	2 x 18 Vac
Rated Power	
No-load voltage (app. x factor)	1.38
No-load loss (typ.)	2.00 W
Efficiency	62.0 %
Standards	
Classification	Safety isolating transformer
Environment	
Ambient temperature max.	40 °C
Safety and protection	
Type	Open type
Insulation class	E
Protection index	IP 00
Safety class (prepared)	II
Short circuit strength	non-short-circuit proof
Overload protection	Typ PTC 880 (Accessory - available on request)
Order numbers	
Order Number	EP 7,5/18 - no longer available

Type	EP 7,5/18 - no longer available
Mechanical data	
Terminal and mounting	
Fixing method	Holes in the core package
Terminals	Pins for PCB
Measures and weights	
Width	0.0 mm
Core type	EI 48/16,5
Weight	0.25 kg

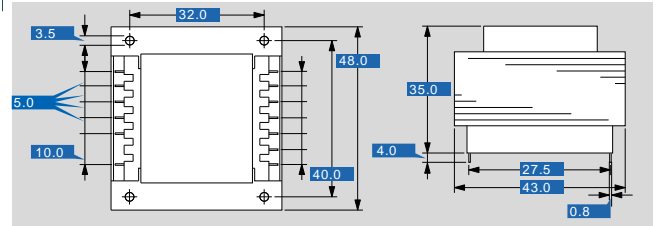

Subject to change.