




Safety isolating transformer FLN 30/9 Discontinued line - not for new designs

Type		FLN 30/9 Discontinued line - not for new designs
Electrical data	Input	
	Rated input voltage	2 x 115 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 9 Vac
	Rated Power	30.0 VA
	No-load voltage (app. x factor)	1.19
	No-load loss (typ.)	2.30 W
	Efficiency	77.0 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, ENEC 10 (VDE)
	Environment	
	Ambient temperature max.	70 °C
Safety and protection		
Type	Encapsulated	
Insulation class	B	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Catalogue logic		
	Not for new designs Alternative type FL 30/9	
Order numbers		
Order Number	FLN 30/9 Discontinued line - not for new designs	

Type		FLN 30/9 Discontinued line - not for new designs
Mechanical data	Terminal and mounting	
	Terminals	Pins for PCB
	Measures and weights	
Core type	UI 39/21	
Weight	0.57 kg	

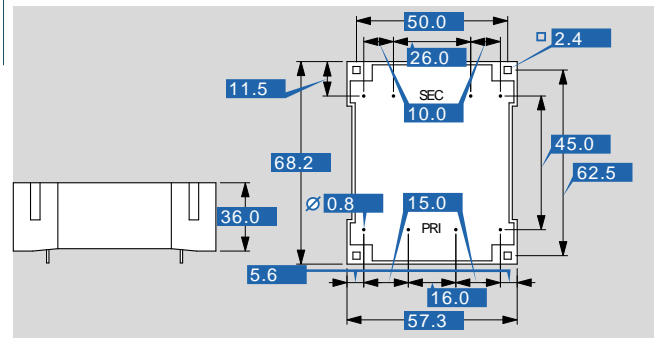

Subject to change.