


Output distribution module **PMM-01 - no longer available**

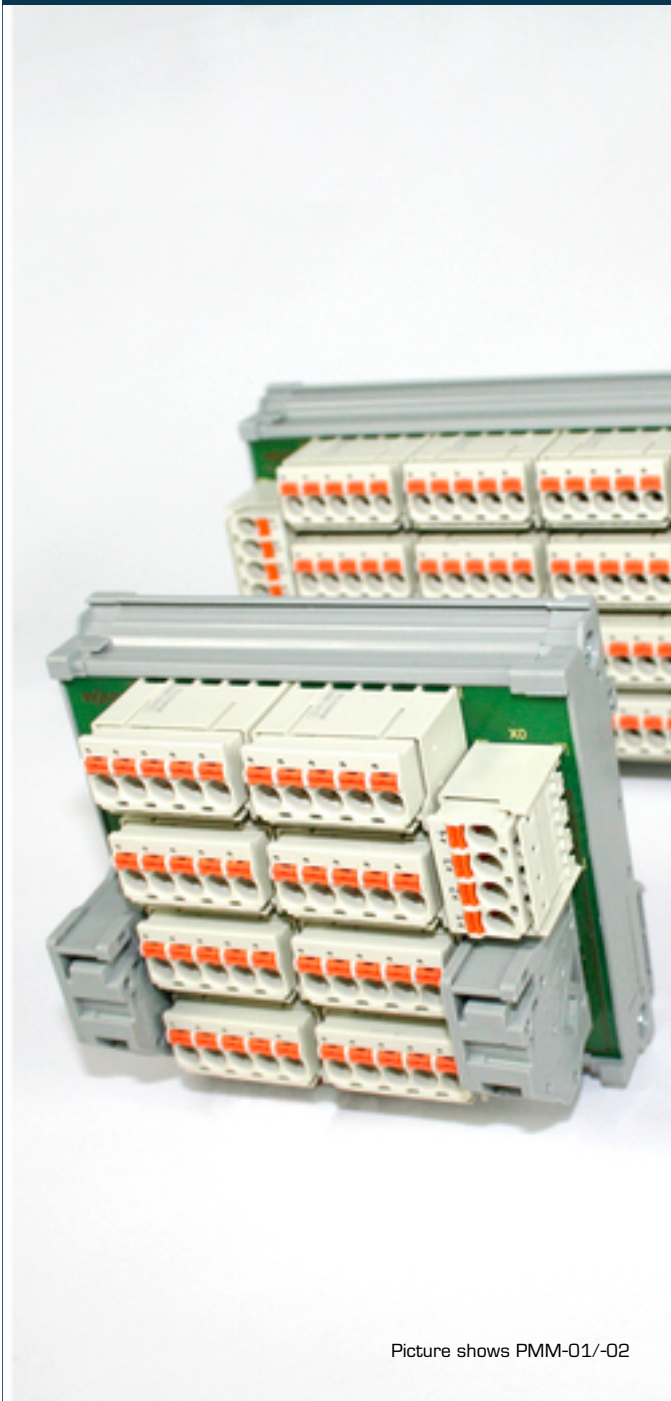

Picture shows PMM-01/-02

Advantages

Plug-in picoMAX® connectors enable pre-wiring and electrical isolation of current paths

Protection against interchanging connectors with optional coding keys

Cable strain relief, thanks to optional strain relief plate

Jumper option of the 0 V feed to adjacent modules via optional jumper comb

Applications

Output distribution module, for 5 x duplication of 4 or 8 24 V DC potential.

Use, for example, on electronic circuit breakers for distribution of 24 V DC and 0 V DC, as a replacement for the modular terminal.

Approvals



Output distribution module PMM-01 - no longer available

Electrical data		Mechanical data	
Type	PMM-01 - no longer available	Type	PMM-01 - no longer available
Operating data	4 DC 24 V 10 A	Terminal and mounting	DIN Rail system TS35
Outlets per potential		Fixing method	
Environment		Measures and weights	
Ambient temperature	-25 °C to +70 °C, without condensation	Dimension (W x H x D)	112 x 85 x 49 mm
Storage temperature	-40 °C ... +85 °C		
Order numbers			
Order Number	PMM-01 - no longer available		