


## Output distribution module **PMM-02 - no longer available**

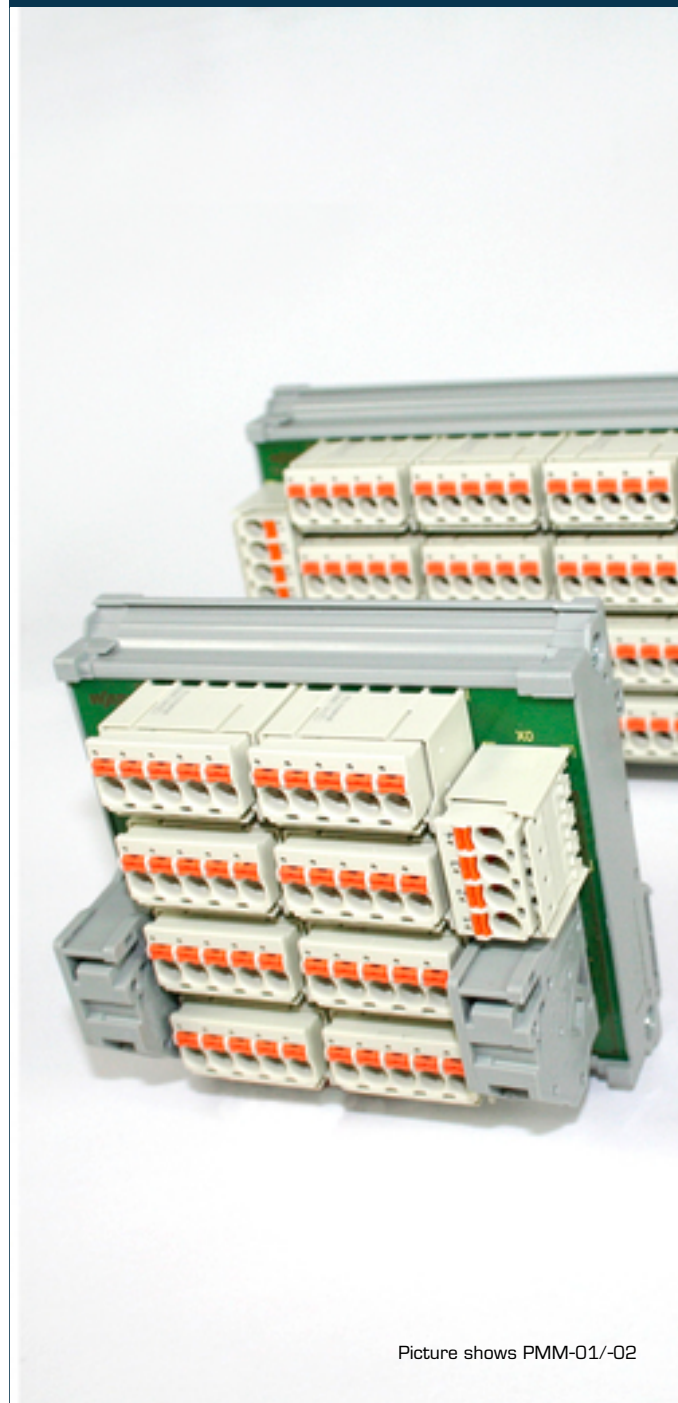

Picture shows PMM-01/-02

### Advantages

Plug-in picoMAX® connectors enable pre-wiring and electrical isolation of current paths

Protection against interchanging connectors with optional coding keys

Cable strain relief, thanks to optional strain relief plate

Jumper option of the 0 V feed to adjacent modules via optional jumper comb

### Applications

Output distribution module, for 5 x duplication of 4 or 8 24 V DC potential.

Use, for example, on electronic circuit breakers for distribution of 24 V DC and 0 V DC, as a replacement for the modular terminal.

### Approvals



## Output distribution module PMM-02 - no longer available

Electrical data		Mechanical data	
Type	PMM-02 - no longer available	Type	PMM-02 - no longer available
Operating data		Terminal and mounting	
Outlets per potential	8	Fixing method	DIN Rail system TS35
Environment		Measures and weights	
Ambient temperature	-25 °C to +70 °C, without condensation	Dimension (W x H x D)	183 x 85 x 49 mm
Storage temperature	-40 °C ... +85 °C		
Order numbers			
<b>Order Number</b>	<b>PMM-02 - no longer available</b>		