

# Safety isolating transformer SIM 800



Picture shows SIM 60

## Advantages

Integrated short-circuit and overload protection

Dual output voltage for series or parallel connection


Very good moisture protection and low noise thanks to XtraDenseFill resin encapsulation (up to 300 VA)

Screw terminals under cover with strain relief

## Applications

Safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application

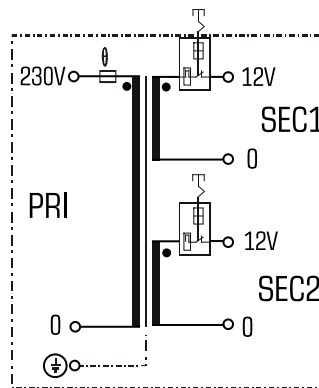

## Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

## Approvals




VDE



# Safety isolating transformer SIM 800

Type		SIM 800
Electrical data	Input	
	Rated frequency	50 - 60 Hz
	Rated input voltage	230 Vac
	Output	
	Rated output voltage	2 x 12 Vac
	Rated Power	800 VA
	No-load voltage (app. x factor)	1.03
	No-load loss (typ.)	27.00 W
	Efficiency	95.0 %
	Standards	
Classification	Safety isolating transformer	
Approvals		
Approvals	VDE, cURus	
Environment		
Ambient temperature max.	40 °C	
Safety and protection		
Type	Encapsulated in metal enclosure	
Insulation class	B	
Protection index	IP 20	
Safety class	I	
Short circuit strength	non-inherently short-circuit proof	
Test voltage	3750 Vac, 50 Hz	
Order numbers		
<b>Order Number</b>	<b>SIM 800</b>	

Type		SIM 800
Mechanical data	Terminal and mounting	
	Fixing method	Fixing holes in enclosure
	Terminals	Screw-type terminal
	Measures and weights	
	Weight	15.60 kg

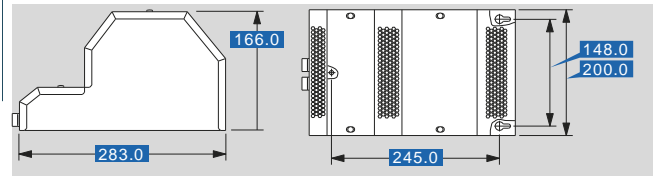

Subject to change.