

# Safety isolating transformer

## VCN 12/1/15 - no longer available



Picture shows VCN 16/2/18

## Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application



## Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

## Approvals






# Safety isolating transformer

## VCN 12/1/15 - no longer available

Type		VCN 12/1/15 - no longer available
<b>Electrical data</b>	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	15.0 Vac
	Rated Power	12.0 VA
	No-load voltage (app. x factor)	1.25
	No-load loss (typ.)	2.10 W
	Efficiency	72.0 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, VDE
	Environment	
	Ambient temperature max.	70 °C
Safety and protection		
Type	Encapsulated	
Insulation class	B	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Order numbers		
<b>Order Number</b>	<b>VCN 12/1/15 - no longer available</b>	

Type		VCN 12/1/15 - no longer available
<b>Mechanical data</b>	Terminal and mounting	
	Terminals	Pins for printed circuit boards
	Measures and weights	
Pin (ø)	0.8 mm	
Core type	EI 48/20,5	
Weight	0.34 kg	

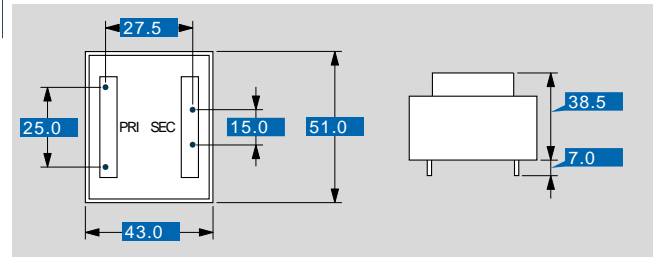

Subject to change.